

# OPTICAL PARTICLE SIZER MODEL 3330

AN EASY-TO-USE PARTICLE SIZER WITH SUPERIOR  
RESOLUTION AND ADJUSTABLE SIZE CHANNELS

The TSI Optical Particle Sizer (OPS) Model 3330 is a light, portable unit that provides fast and accurate measurement of particle concentration and particle size distribution using single particle counting technology. Backed by over 40 years of aerosol instrumentation design experience, the OPS uses state-of-the-art optics with 120° light collection and sophisticated electronics processing resulting in precision, high quality data. Rigorous factory calibration standards ensure measurement accuracy. The model 3330 can be used alone, or it can be placed in TSI's weatherproof Environmental Enclosure.



## Applications

Quality optical instruments are useful in a variety of applications due to their ease of use, fast measurement time, robustness, and reliability. A few common applications are listed below.


- + Filter testing (i.e. ASHRAE 52.2)
- + Indoor air quality
- + Work place monitoring
- + Outdoor environmental monitoring
- + Industrial Measurements
- + Emissions monitoring and control

## Features and Benefits

- + Size resolution < 5% at 0.5  $\mu\text{m}$
- + User adjustable size channels
- + Size range: 0.3 - 10  $\mu\text{m}$  in up to 16 channels
- + Wide concentration range from 0 to 3,000 particles/ $\text{cm}^3$
- + Color touch screen with intuitive user interface
- + Fully compliant with ISO 21501-01/04
- + Displays particle number concentration and particle mass with the ability to input refractive index and particle density
- + Filter-based sample collection for later gravimetric or chemical analysis
- + Battery-powered for up to 20 hours of operation
- + Built-in data logging capability for up to 30,000 samples
- + Temperature and pressure recorded for every sample



UNDERSTANDING, ACCELERATED

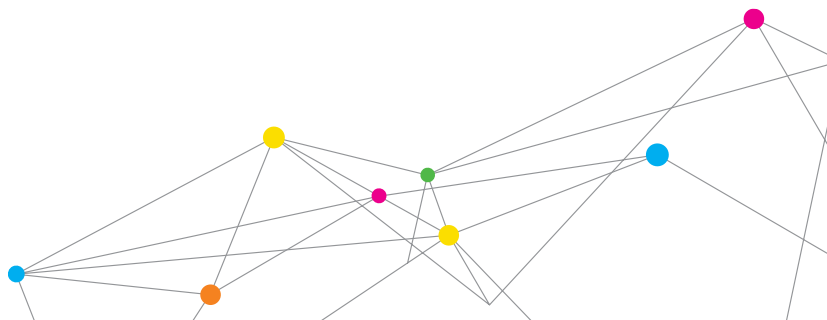


## Operation

The sample aerosol is pulled straight into the measurement region of the OPS Model 3330 to reduce particle losses due to transport. A sheath flow surrounds the sample, focusing the aerosol to enhance size resolution, and keeping the optics clean for improved reliability and low maintenance. The flow rates in the OPS are carefully controlled using real-time feedback to ensure concentration accuracy. The temperature and humidity of the sample is measured and recorded. In the optical chamber, the aerosol crosses a laser beam, creating a light pulse. The intensity of the flash is used to count and size the particles. The shape of the laser beam, the size of the viewing volume, the type of detector and the signal processing algorithms in the Model 3330 were designed to provide optimal resolution over the size range of 0.3 to 10  $\mu\text{m}$ . The increased light collection ( $90^\circ \pm 60^\circ$ ) reduces Mie scatter effects. After being sized, the sample flows from the optics chamber to the filter cartridge where it is collected on a 37 mm filter, for gravimetric analysis or further chemical or microscopic sample investigation.

## Measurement Quality

In addition to improving the core measurement fundamentals of OPCs, the Model 3330 includes the ability to input the index of refraction and shape factor of the aerosol into the software to provide more accurate size distributions. The size boundaries can be adjusted using both real and imaginary components of refractive index. A unique density for every size channel can also be inputted into the software to further improve mass concentration measurement.

The Model 3330 is manufactured at TSI's ISO 9001 certified facility. It is calibrated using NIST traceable PSL spheres and TSI's accredited Electrostatic Classifier and Condensation Particle Counters. PSL is the industry wide calibration aerosol of choice because it has properties close to many real world aerosols and is traceable to national standards throughout the world. Each OPS that leaves the factory is built for longevity, backed by TSI's commitment to quality, and supported by our worldwide network of committed TSI professionals.

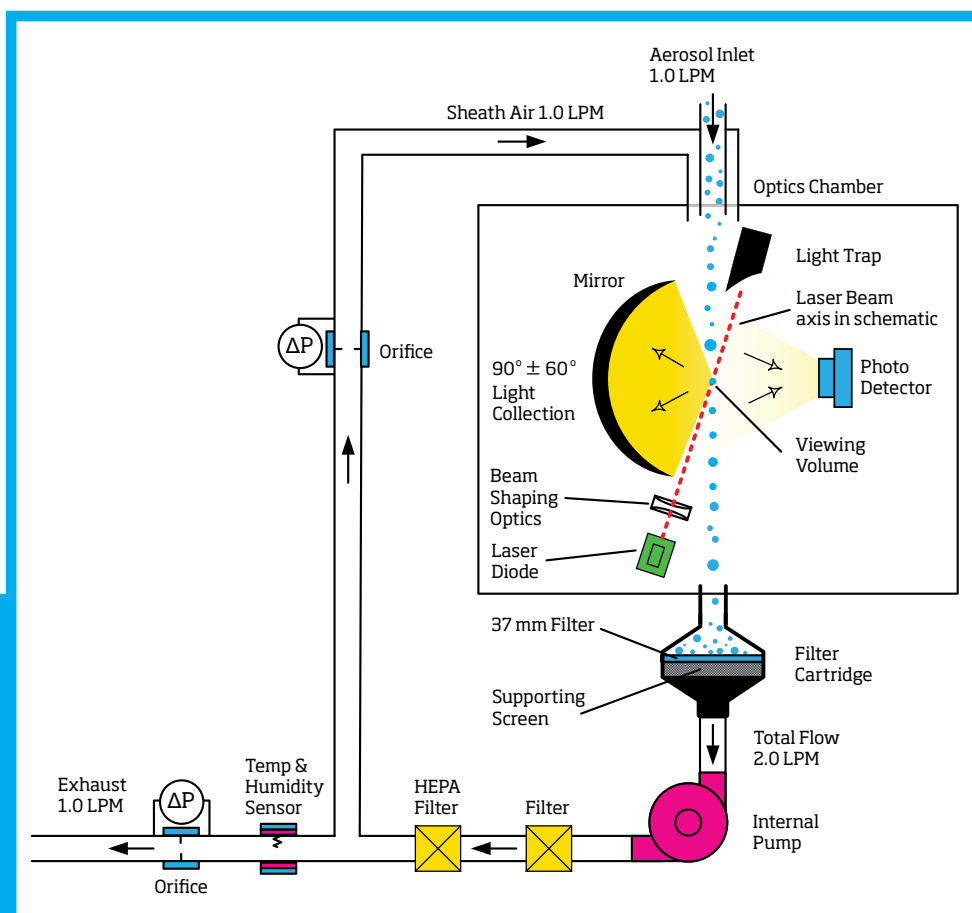

Optical Particle Sizer

## Easy to Program and Operate

The color touch-screen and user interface was designed to allow investigators to intuitively operate the instrument. The easy-to-read front panel shows real-time count and mass data in graphical or tabular format. Data can be shown as counts, concentration or normalized concentration in either linear or log format. The display gives status information on pump, laser, flow rate, and much more. From the instrument, users can program start times, total sampling times, an alarm set point and many other parameters. The internal memory can store sample records which can be conveniently viewed on screen or easily downloaded using a flash drive. Data can also be saved directly to a computer via a USB cable or Ethernet connection.


## Powerful Software

TSI's particle instrument Aerosol Instrument Manager® Software now supports the OPS Model 3330. The Microsoft® Windows® 7, 64-bit compatible software controls instrument operation and provides file management capabilities. Live data graphs and data tables can be viewed from the PC. The data can be weighted by moments of number concentration including surface area and mass, and the software automatically calculates statistics on every data set.


Dilution factors, density and refractive index can be easily inputted. A handy playback feature allows a visual review of collected data, and new to this version, multiple samples can be viewed on the same graph for quick comparison. An export function with auto export option, allows easy transport of data files to spreadsheet or other application for customized data handling.

## Featured Applications


- + **Filter Testing:** The intrinsic resolution, wide concentration range, flow rate and fast measurement time make the OPS ideal for measuring upstream and downstream of filters or filter media. The Model 3330 complies with the requirements for filter testing in accordance with ASHRAE 52.2.
- + **Outdoor Environmental Monitoring:** Optical particle counters are frequently used in ambient monitoring to provide an estimate of the supermicron particle size fraction. The 3330 is a cut above the field of existing OPCs providing a higher quality measurement paired with a state-of-the-art user interface.
- + **Industrial measurements:** Investigators from industry routinely need a quick, easy method to measure airborne particles. The Model 3330 provides this type of industrial user a meaningful measurement at an affordable price.

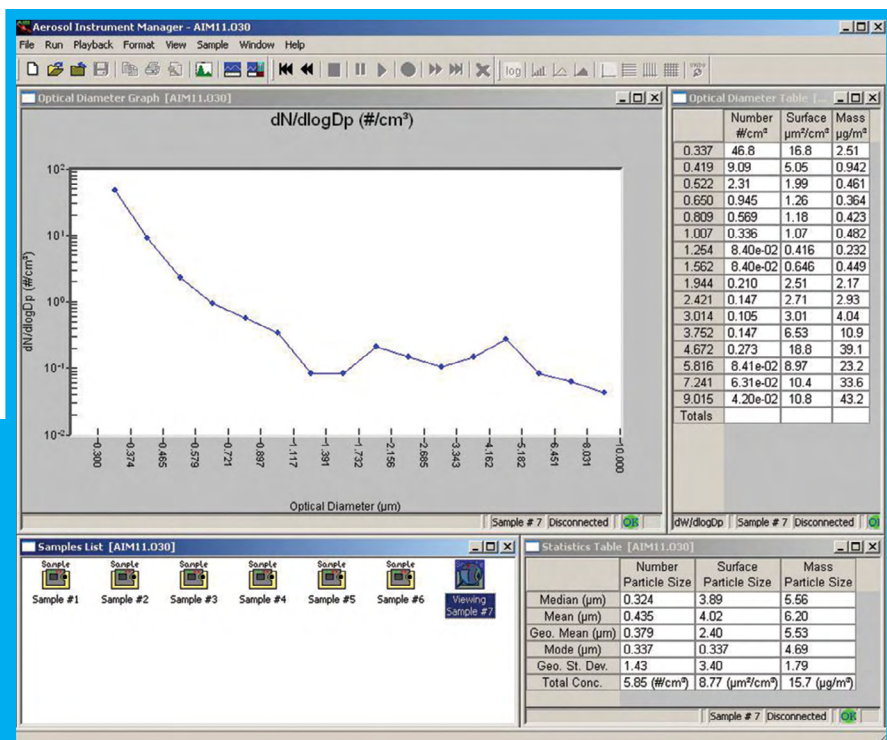

Aerosol Instrument Manager® Software for the OPS

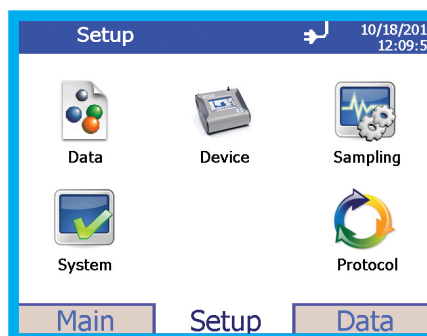

OPS Model 3330 Status Screen

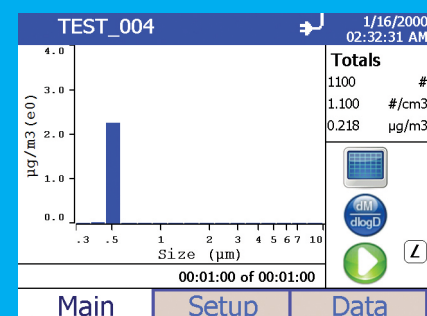

Mass size distribution for 0.49 µm ± 9nm classified PSL spheres

## SPECIFICATIONS

### OPTICAL PARTICLE SIZER MODELS 3330

#### Measurement Principle

120° light scatter and filter sampling

#### Particle Concentration Limit

Up to 3,000 particles/cm<sup>3</sup> (3,000,000 particles/liter)

#### Mass Concentration

0.001 to 275, 000 µg/m<sup>3</sup>

#### Particle Sizing

Particle Size Range	0.3 to 10 µm
Size Resolution	5% at 0.5 µm per ISO 21501-01/04
Size Channels	Up to 16, user-adjustable size channels

#### Sampling Time

≥ 1 second, user-adjustable

#### Zero Count

< 1 count per minute

#### Flow Rate

Sample	1.0 L/min; ±5% accuracy (meets ISO 21501)
Sheath	1.0 L/min

#### Environmental Conditions

Operational Temp	0 to 45° C (32 to 113° F)
Operational Humidity	0 to 96% RH, non-condensing
Storage Temp	-20 to 60° C (-4 to 140° F)

#### Aerosol Medium

Air only

#### Data Storage

5MB on-board memory (30,000 samples)

#### Communications

Interfaces	USB, Ethernet or USB flash drive
Digital Display	5.7 in. color touchscreen w/graphical display
Analog Output	0 to 5V or 4 to 20 mA. User selectable out-put and user selectable
Alarm Out	Visual indication, audible buzzer, relay or switch. User selectable set point

#### Gravimetric Sampling

37 mm filter inside standard removable 37 mm filter cartridge

#### Vacuum Source

Internal pump

#### Light Source

Long lasting laser diode

#### Power

AC Adaptor	100-240 VAC, 50/60 Hz, 15W
------------	----------------------------

#### Physical Features

Physical Size (H x W x D)	13.5 x 21.6 x 22.4 cm (5.3 x 8.5 x 8.8 in.)
Weight, Instrument	1.6 kg (3.5 lb)
Weight, Battery	0.5 kg (1 lb)

#### Battery Performance (hot swappable)

Runtime	1 battery up to 10 hours, 2 batteries up to 20 hours
Charge time	1 battery up to 4 hours, 2 batteries up to 8 hours

#### Safety Certifications

CE Immunity/Emissions	EN61236-1:2006
CAN/CSA	C22.2 No. 61010-1

#### Software

Supplied with Aerosol Instrument Manager® Software for the OPS

#### Calibration

Annual calibration recommended at TSI using NIST\* traceable materials and analytical tools

#### Included Accessories

Operation manual, power supply, battery, purge filter, USB cable, carrying case and Aerosol Instrument Manager software for the OPS

#### Optional Accessories

Additional battery, dual port external battery charger, aerosol diluters and environmental enclosure

#### TO ORDER

##### Optical Particle Sizer

Specify	Description
3330	Optical Particle Sizer

##### Optional Accessories

Specify	Description
801680	6600 mAh Li-ion Battery Pack
801685	External Battery Charger
3332-10	Dilution System (10:1 dilution ratio)
3332-100	Dilution System (100:1 dilution ratio)
8535	Environmental Enclosure

\*NIST - National Institute of Standards and Technology

Aerosol Instrument Manager, TSI and the TSI logo are registered trademarks of TSI Incorporated.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website [www.tsi.com](http://www.tsi.com) for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8251 6588
France	Tel: +33 4 91 11 87 64	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		