

No.1114 Multi Film Applicator



상하 8면의 다른 코팅두께를 가진다.

MODEL	1114
코팅 폭	76 mm
코팅 두께	25, 50, 75, 100, 125, 150, 175, 200 μ m

* 특주품 가능


No.1100 Bar Film Applicator



MODEL	1100
코팅 폭	50, 75, 100, 150 mm (선택)
코팅두께	50, 75, 100, 125, 150, 200, 250 μ m (선택)

* 특주품 가능

Anti Sag Meter (ASM)

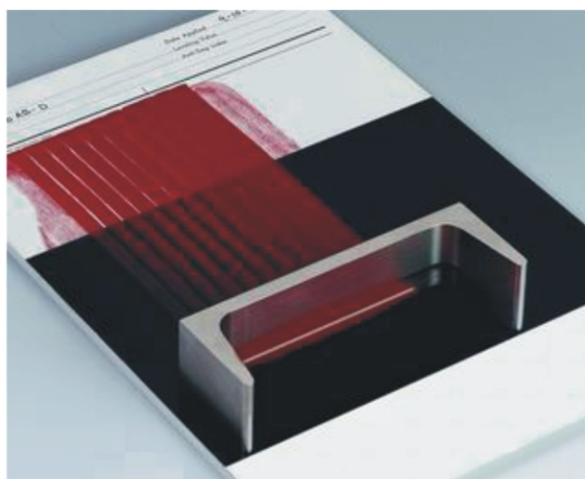

MODEL	범 위
ASM-1	3~12mils (75~300 μ m)
ASM-2	1~6mils (25~150 μ m)
ASM-3	14~60mils (350~1500 μ m)
ASM-4	4~24mils (100~600 μ m)

- 코팅 막의 흐름성을 측정하는 기기.
- 각 범위 별로 10~11단계의 두께가 설정됨.