

Cirrus
optimus[®]
 sound level meters

High Level Noise Measurement option for the optimus Sound Level Meters



- Measurement of noise levels up to 170dB² with Class 1 performance
- Ideal for Firing Ranges & Gunfire Noise Measurements
- Compatible with all of the optimus sound level meters¹
- Automatic calibration adjustment - no manual corrections needed
- All standard instrument measurement functions available

The accurate measurement of noise exposure from firearms has often proved difficult due to the high noise levels generated. In the past you would have needed a very complicated sound level meter and microphone to be able to measure over 140dB.

Our new optimus sound level meters can now be fitted with a high level microphone that can measure up to 170dB², quickly and simply.

Simply swap the normal microphone/preamplifier on the optimus sound level meter for the MV:200EH, calibrate as you would normally and you're ready to go.

All of the standard measurement functions of the optimus are available such as LAeq, LCPeak, LEP,d and 1:1 Octave Bands as well as the VoiceTag Audio Recording.

Cirrus
 Research plc
 dedicated to noise measurement

Specifications



MV:200EH High Level Noise Measurement Microphone System

Measurement Functions

The measurement functions available are determined by the sound level meter used.

Please refer to the instrument specifications for details of the measurements available and the performance of the instrument.

Performance

The MV:200EH is a Class 1 1/2" Pre-Polarised Electret Condenser High Level Measurement Microphone.

When the MV:200EH is used, the instrument performance is to Class 1 of IEC 61672. This is acceptable for compliance with the 2005 Control of Noise at Work Regulations.


Notes:

*1. The MV:200EH is compatible with the following optimum sound level meters:

- CR:151A & CR:152A Sound Level Meters
- CR:151B & CR:152B Sound Level Meters
- CR:161A & CR:162A Sound Level Meters
- CR:161B & CR:162B Sound Level Meters
- CR:161C & CR:162C Sound Level Meters
- CR:161D & CR:162D Sound Level Meters
- CR:171A & CR:172A Sound Level Meters
- CR:171B & CR:172B Sound Level Meters
- CR:171C & CR:172C Sound Level Meters

*2. The upper measurement limit is determined by the THD.

All values, figures and performance statements are typical and are subject to change without notice.

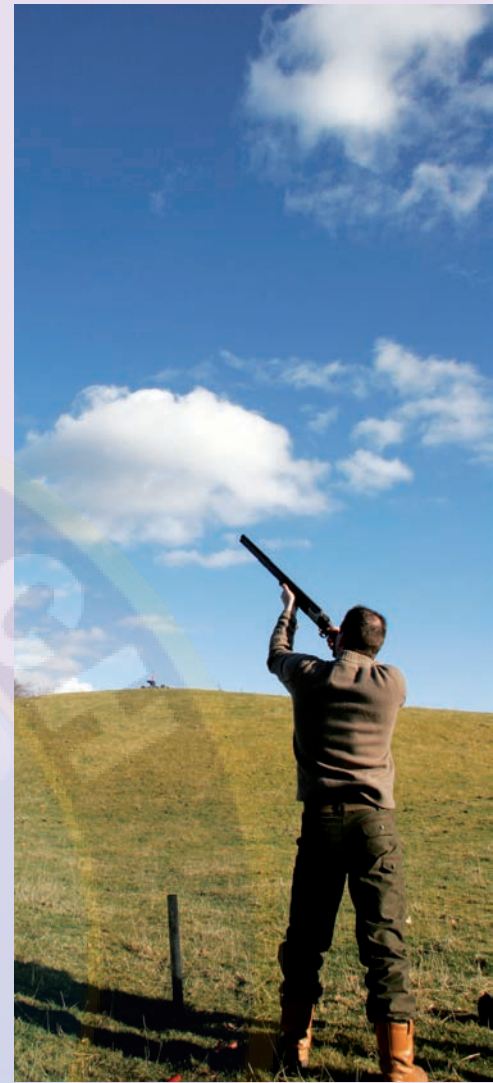

Acoustic House
Bridlington Road
Hunmanby
North Yorkshire
YO14 0PH
United Kingdom

T: 0845 230 2434
T: +44 1723 891655
F: +44 1723 891742
E: sales@cirrusresearch.co.uk
W: www.cirrusresearch.co.uk

